

This is a digital copy of a book that was preserved for generations on library shelves before it was carefully scanned by Google as part of a project to make the world's books discoverable online.

It has survived long enough for the copyright to expire and the book to enter the public domain. A public domain book is one that was never subject to copyright or whose legal copyright term has expired. Whether a book is in the public domain may vary country to country. Public domain books are our gateways to the past, representing a wealth of history, culture and knowledge that's often difficult to discover.

Marks, notations and other marginalia present in the original volume will appear in this file - a reminder of this book's long journey from the publisher to a library and finally to you.

Usage guidelines

Google is proud to partner with libraries to digitize public domain materials and make them widely accessible. Public domain books belong to the public and we are merely their custodians. Nevertheless, this work is expensive, so in order to keep providing this resource, we have taken steps to prevent abuse by commercial parties, including placing technical restrictions on automated querying.


We also ask that you:

- + *Make non-commercial use of the files* We designed Google Book Search for use by individuals, and we request that you use these files for personal, non-commercial purposes.
- + Refrain from automated querying Do not send automated queries of any sort to Google's system: If you are conducting research on machine translation, optical character recognition or other areas where access to a large amount of text is helpful, please contact us. We encourage the use of public domain materials for these purposes and may be able to help.
- + *Maintain attribution* The Google "watermark" you see on each file is essential for informing people about this project and helping them find additional materials through Google Book Search. Please do not remove it.
- + *Keep it legal* Whatever your use, remember that you are responsible for ensuring that what you are doing is legal. Do not assume that just because we believe a book is in the public domain for users in the United States, that the work is also in the public domain for users in other countries. Whether a book is still in copyright varies from country to country, and we can't offer guidance on whether any specific use of any specific book is allowed. Please do not assume that a book's appearance in Google Book Search means it can be used in any manner anywhere in the world. Copyright infringement liability can be quite severe.

About Google Book Search


Google's mission is to organize the world's information and to make it universally accessible and useful. Google Book Search helps readers discover the world's books while helping authors and publishers reach new audiences. You can search through the full text of this book on the web at http://books.google.com/



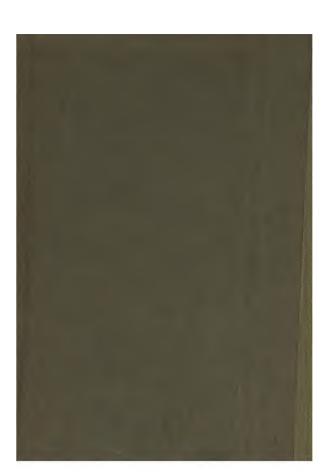









ANALYSIS

OF

ROTARY MOTION,

AS APPLIED TO

THE GYROSCOPE.

RV

MAJOR J. G. BARNARD, A. M.



NEW YORK:

D. VAN NOSTRAND, PUBLISHER, 28 MURRAY AND 27 WARREN STREETS.



Keplaring meseng exp

PREFACE.

The apparatus discussed here under the name Gyroscope was exhibited by Professor Walter R. Johnson, of the University of Pennsylvania, in 1831. It was then called the Rotascope, but it excited but little interest.

Professor Foucault, of France, brought it forward in 1855, and employed it as a means of making the earth's rotation visible to the eye. Since that time some form of Gyroscope (the name given it by Foucault) has formed a part of the philosophical apparatus for schools.

For some time the impression prevailed in the popular mind that the phenomena exhibited by the apparatus could not be explained by natural laws. This idea was perhaps strengthened by the name applied to it by Professor Olmstead, who called it "The Mechanical Paradox."

The following analytical exposition of

the motions of the Gyroscope was written by General (then Major) Barnard in 1858, for the Journal of Education. It was immediately reprinted in pamphlet form and was eagerly sought for by students of Analytical Mechanics. It yet remains the best treatise on this interesting apparatus.

As the former editions were long since exhausted, while the demand for the essay continued, it was considered advisable to republish it in its original form, first as a Magazine article and then as a volume of the Science Series.

G. W. P.

ANALYSIS OF ROTARY MOTION,

AS APPLIED TO

THE GYROSCOPE.

After reading most of the popular explanations of the above phenomenon given in our scientific and other publications, I have found none altogether satisfactory. While, with more or less success, they expose the more obvious features of the phenomenon and find in the force of gravity an efficient cause of horizontal motion, they usually end in destroying the foundation on which their theory is built, and leave an effect to exist without a cause; a horizontal motion of the revolving disk about the point of support is supposed to be accounted for, while the descending motion, which is the first and direct effect of gravity (and without which no horizontal motion can take place), is ignored or supposed to be entirely eliminated. Indeed, it is gravely stated as a distinguishing peculiarity of rotary motion, that, while gravity acting upon a non-rotating body causes it to descend vertically, the same force acting upon a rotary body causes it to move horizontally. A tendency to descend is supposed to produce the effect of an actual descent; as if, in mechanics, a mere tendency to motion ever produced any effect whatever without that motion actually taking place.

Whatever "mystification" there may be in analysis—however it may hide its results under symbols unintelligible save to the initiated, it is most certain that the greater portion of the physical phenomena of the universe are utterly beyond the grasp of the human mind without its aid. The mind can—indeed it nusst—search out the inducing causes, bring them together and adjust them to each other, each in its proper relation to the rest; but farther than that (at least in complicated phenomena) unaided, it cannot go. It cannot follow these causes in all their various actions and reactions and at a

given instant of time bring forth the results.

This, analysis alone can do. After it has accomplished this, it indeed usually furnishes a clue by which to trace how the workings of known mechanical laws have conspired to produce these results. This clue I now propose to find in the analysis of rotary motion as applied to the gyroscope.

The analysis I shall present, so far as determining the equations of motions is concerned, is mainly derived from the works of Poisson (vide "Journal de l'Ecole Polytech." vol. XVI—Traité de Mécanique, vol. II, p. 162). Following his steps and arriving at his analytical results, I propose to develop fully their meaning, and to show that they are expressions not merely of a visible phenomenon, but that they contain within themselves the sole clue to its explanation; while they dispel all that is mysterious or paradoxical, and in reducing it to merely a "particular case" of the laws of "rotary

motion," throw much light upon the significance and working of those laws.

Although not unfamiliar to mathematicians, it may not be uninteresting to those who have not time to go through the long preliminary study necessary to enable them to take up with Poisson this special investigation, or whose studies in mechanics have led them no farther than to the general equations of "rotary motion," found in text books, to show how the particular equations of the gyroscopic motion may be deduced.

In so doing I shall closely follow him; making, however, some few modifications for the sake of brevity and of avoiding the use of numerous auxiliary quantities not necessary to the limited scope of this investigation.

The general equations of rotary motion are (see Prof. Bartlett's "Analytical Mechanics," Equations (228), p. 170):


$$C\frac{dv_z}{dt} + v_x v_y (B - A) = L_1$$

$$B\frac{dv_y}{dt} + v_x v_z (A - C) = M_1$$

$$A\frac{dv_x}{dt} + v_y v_z (C - B) = N_1$$
(1)

In the above expressions the rotating body (of any shape) ABCD, Fig. 1, is supposed retained by the fixed point within or without its mass) O. Ox, Oy and Oz are the three co-ordinate axes, fixed in space, to which the motion of the body is referred. Ox, Oy, Oz, are the three principal axes belonging to the point O, and which, of course, partake of the body's motion. The position of the body at any instant of time is determined by those of the moving axes.

A, B and C express the several "moments of inertia" of the mass with reference, respectively, to the three principal axes Ox, Oy, Oz,; N,, M, and L, are the moments of the accelerating forces, and v_x, v_y, v_z, the components of rotary



velocity, all taken with reference to these same axes.

Like lineal velocities, velocities of rotation may be decomposed—that is, a rotation about any single axis may be considered as the resultant of components about other axes (which may always be reduced to three rectangular ones); and by this means, about whatever axis the body, at the instant we consider, may be revolving, its actual velocity and axis are determined by a knowledge of its components v, v, v, about the principal axes Ox, Oy, Oz, these components being, as with lineal velocities, equal to the resultant velocity multiplied by the cosine of the angles their several rectangular axes make with the resultant axis.

As the true axis and rotary velocity may continually vary, so the components v_x, v_y, v_z , in equations (1) are variable functions of the time.

For the purpose of determining the axes Ox_i , Oy_i and Oz_i , with reference to the (fixed in space) axes Ox, Oy, Oz, three auxiliary angles are used.

If we suppose the moving plane of x_1 , at the instant considered, to intersect the fixed plane of xy in the line NN' and call the angle $xON = \psi$, and the angle between the planes xy and x_1y_1 (or the angle $zOz_1 = \theta$, and the angle $NOx_1 = \varphi$, (in the figure, these three angles are supposed acute at the instant taken) these three angles will determine the positions of the axes Ox_1 , Oy_1 , Oz_1 , (and hence of the body) at any instant, and will themselves be functions of the time; and the rotary velocities v_x , v_y , v_z , may be expressed in terms of them and of their differential coefficients.

For this purpose, and for use hereafter in our analysis, it is necessary to know the values, in terms of φ , θ and ψ , of the cosines of the angles made by the axes Ox_1 , Oy_1 and Oz_1 with the fixed axes Oz and Oy_2 .

These values are shown to be (vide Bartlett's Mech., p. 172)

 $\cos x_1Oz = -\sin \theta \sin \varphi$ $\cos y_1Oz = -\sin \theta \cos \varphi$ $\cos z_i Oz = \cos \theta$

cos. $x_1Oy = \cos \theta \cos \psi \sin \theta$ $-\sin \psi \cos \theta$

cos. $y_1 Oy = \cos \theta \cos \phi \cos \phi + \sin \psi \sin \phi$

 $\cos z_i Oy = \sin \theta \cos \phi$

The differential angular motions, in the time dt, about the axes Ox_1 , Oy_1 , Oz_2 , will be $v_x dt$, $v_y dt$, and $v_z dt$. We may determine the values of these motions by applying the laws of composition of rotary motion to the rotations indicated by the increments of the angles θ , φ and ψ .

If θ and φ remain constant, the increment $d\varphi$ would indicate that amount of angular motion about the axis Oz perpendicular to the plane in which this angle is measured. In the same manner $d\varphi$ would indicate angular motion about the axis Oz_1 ; while $d\theta$ indicates rotation about the line of nodes ON. In using these three angles, therefore, we actually refer the rotation to the three axes Oz_1 , Oz_2 , Oz_3 , Oz_4 , Oz_5 , is fixed in

space, another, Oz_1 , is fixed in and moves with the body, and the third, ON, is shifting in respect to both.

The angular motion produced around the axes Ox_1 , Oy_1 , Oz_1 , by these simultaneous increments of the angles φ , θ and ψ , will be equal to the sum of the products of these increments by the cosines of the angles of these axes, respectively, with the lines Oz_1 , Oz_2 , and ON_3 .

The axis of Oz_1 for example makes the angles θ , 0° and 90° with these lines, hence the angular motion $v_z dt$ is equal (taking the sum without regard to sign) to $\cos \theta d\psi + d\varphi$.

In the same manner (adding without regard to signs),

$$v_x dt = \cos x_1 Oz d\phi + \cos \varphi d\theta$$

and $v_y dt = \cos y_1 Oz d\phi + \cos (90^\circ + \varphi) d\theta$.

But if we consider the motion about Oz_i indicated by $d\varphi$, positive, it is plain from the directions in which φ and ψ are laid off on the figure, that the motion $ext{cos}$ $ext{d}\psi$ will be in the reverse direction

and negative, and since $\cos \theta$ is positive $d\psi$ must be regarded as negative, hence

$$v_z dt = d\varphi - \cos \theta d\phi$$

The first term of the value of $v_x dt$, cos. $x_1 Oz d\psi$ [since cos. $x_1 Oz$ (= $-\sin \theta$ sin. φ) is negative and $d\psi$ is to be taken with the negative sign] is positive. But a study of the figure will show that the rotation referred to the axis Ox_1 , indicated by the first term of this value, is the reverse of that measured by a positive increment of θ in the second, and hence, (as cos. φ is positive,) $d\theta$ must be considered negative. Making this change and substituting the values given of cos. $x_1 Oz$, cos. $y_1 Oz$, and for cos. $(90^\circ + \varphi)$, $-\sin \varphi$, we have the three equations

$$\begin{array}{l} v_x dt = \sin \theta \sin \phi d\psi - \cos \phi d\theta \\ v_y dt = \sin \theta \cos \phi d\psi + \sin \phi d\theta \\ v_z dt = d\phi - \cos \theta d\psi \end{array} \right\} (2)^*$$

^{*} To avoid the introduction of numerous quantities foreign to our particular investigation and a tedious analysis, I have departed from Poisson and substituted the above simple method of getting equations (2.), which is an instructive illustration of the principles of the composition of rotary motions.

The general equations (1) are susceptible of integration only in a few particular cases. Among these cases is that we consider, viz., that of a solid of revolution retained by a fixed point in its axis of figure.

Let the solid ABCD, Fig. 1, be supposed such a solid, of which Oz, is the axis of figure. It will be, of course, a principal axis, and any two rectangular axes in the plane, through O perpendicular to it, will likewise be principal. By way of determining them, let Oz, be supposed to pierce the surface in some arbitrarily assumed E point in this plane. Let G be the center of gravity (gravity being the sole accelerating force). The moments of inertia A and B become equal, and equations (1) reduce to

^{*} See Bartlett's Mech. Equations (225) and (118) for the values of $L_1 M_1 N_1$; in the case we consider the extraneous force P (of eq. 118) is g; the co-ordinates x, y of its point of application G (referred to the axes Ox, Oy_1 , Ox_1 ,) are zero and $z^1 = OG = \gamma$; cosines of a, β and γ are a, b and c; hence $L_1 = O$, $M_1 \gamma \alpha M_2$, $N_1 = -\gamma \rho M_2$.

in which the distance OG of the point of support from the center of gravity is represented by γ , g is the force of gravity, M the mass and α and b stand for the cosines x_1Oz and y_1Oz and of which the values are

$$a = -\sin \theta \sin \varphi$$
, $b = -\sin \theta \cos \varphi$.

The first equation (3) gives by integration $v_z=n$, n being an arbitrary constant; it indicates that the rotation about the axis of figure remains always constant.

Multiplying the two last equations (3) by v_y and v_x respectively and adding the products, we get

$$\mathbf{A}(v_y dv_y + v_x dv_x) = \gamma \mathbf{M} g(av_y - bv_x) dt.$$

From the values of a and b above, and from those v_x and v_y (equations 2) it is easy to find

$$(av_y-bv_x)dt=-\sin\theta d\theta=d\cos\theta;$$

substituting this value and integrating and calling h the arbitrary constant

$$\mathbf{A}(v_y^2 + v_x^2) = 2\gamma \mathbf{M}g \cos \theta + h. \quad (a)$$

Multiplying the two last equations (3), respectively, by b and a and adding and reducing by the value just found of d. cos. θ and of v_z , we get

$$A(bdv_y + adv_x) + (C-A)nd. \cos \theta = O(b)$$

Differentiating the values of a and b and referring to equations (2) it may readily be verified (putting for v_z its value n) that

$$db = (v_x \cos \theta - an)dt$$
$$da = (bn - v_y \cos \theta)dt$$

and multiplying the first by Av_y and the second by Av_x and adding

$$\mathbf{A}(v_y db + v_x da) = \mathbf{A}n(bv_x - av_y)dt$$

$$= -\mathbf{A}nd. \cos \theta.$$

Adding this to equation (b), we get

Ad. $(bv_y + av_x) + Cnd$. cos. $\theta = 0$, the integral of which is

 $A(bv_y + av_x) + Cn \cos \theta = l(l \text{ being an arbitrary constant}).$ (c)

Referring to equations (2) it will be found by performing the operations indicated that:

$$v_x^2 + v_y^2 = \sin^2\theta \frac{d\phi^3}{dt^3} + \frac{d\theta^3}{dt^3}$$

$$bv_y + av_x = -\sin^2\theta \frac{d\phi}{dt}$$

Substituting these values in equations (a) and (c), we get

Cn.
$$\cos \theta - A \sin^2 \theta \frac{d\psi}{dt} = l$$

$$A \left(\sin^2 \theta \frac{d\psi^2}{dt^2} + \frac{d\theta^2}{dt^2} \right) = 2Mg\gamma \cos \theta + h$$

If, at the origin of motion, the axis of figure is simply deviated from a vertical position by an arbitrary angle a, in the plane of xz, and an arbitrary velocity n is imparted about this axis alone; then v_x and v_y will at that instant be zero, $\theta = a$, and the substitution of these values in equations (a) and (c) will determine the values of the constants l and h.

$$h=-2Mg\gamma \cos a$$

 $l=Cn \cos a$

which, substituted in the above equations, make them

$$\sin^{2}\theta \frac{d\psi}{dt} = \frac{Cn}{A}(\cos \theta - \cos \alpha)$$

$$\sin^{2}\theta \frac{d\psi^{2}}{dt^{2}} + \frac{d\theta^{2}}{dt^{2}} = \frac{2Mg\gamma}{A}$$

$$(\cos \theta - \cos \alpha)$$
(4)

These together with the last equation (2) which may be written, (substituting the value of v_z)

$$d\varphi = ndt + \cos \theta d\psi$$
 (5)

will (if integrated) determine the three angles φ , θ and ψ in terms of the time t. They are therefore the differential equations of motion of the gyroscope.

Let NEE', (Fig. 1,) be a section of the solid by the plane $x_1 y_1$. This section may be called the equator. E being some fixed point in the equator (through which the principal axis Ox_1 passes), the angle φ is the angle EON.

If N is the ascending node of the equator—that is, the point at which E in its axial rotation rises above the horizontal plane, the angle φ must increase from N

towards E—that is, $d\varphi$ (in equation 5) must be positive and (as the second term of its value is usually very small compared to the first) the angular velocity n must be positive. That being the case the value of $d\varphi$ will be exactly that due to the constant axial rotation ndt, augmented by the term $\cos \theta d\psi$, which is the projection on the plane of the equator of the angular motion $d\psi$ of the node. This term is an increment to ndt when it is positive, and the reverse when it is negative. In the first case, the motion of the node is considered retrograde—in the second, direct.

The first member of the second equation (4) being essentially positive, the difference $\cos \theta - \cos a$ must be always positive—that is, the axis of figure Oz, can never rise above its initial angle of elevation a. As a consequence $\frac{d\psi}{dt}$ [in

first equation (4)] must be always positive. The node N, therefore, moves always in the direction in which ϕ is laid off positively, and the motion will be direct

or retrograde, with reference to the axial rotation, according as $\cos \theta$ is negative or positive—that is, as the axis of figure is above or below the horizontal plane. In either case the motion of the node in its own horizontal plane is always progressive in the same direction. If the rotation n were reversed, so would also be the motion of the node.

If this rotation n is zero, $\frac{d\psi}{dt}$ must also be zero and the second equation (4) reduces at once to the equation of the compound pendulum, as it should. Eliminating $\frac{d\psi}{dt}$ between the two equations (4) we get

$$\sin^{2}\theta \frac{d\theta^{2}}{dt^{2}} = \frac{2Mg\gamma}{A} \left[\sin^{2}\theta - \frac{C^{2}n^{4}}{2AM\gamma g} \right]$$

$$(\cos \theta - \cos a) \left[(\cos \theta - \cos a) \right]$$

The length of the simple pendulum which would make its oscillations in the same time as the body (if the rotary

velocity n were zero) is $\frac{A}{M_{\chi}}$.* If we call this \(\lambda \) and make for simplicity $\frac{\mathbf{C}^2 n^2}{2\mathbf{A}^2 a} = \frac{2\beta^2}{\lambda}$ the above equation becomes $\sin^2\theta \frac{d\theta^2}{dt^2} = \frac{2g}{3} [\sin^2\theta - 2\beta^2(\cos\theta - \cos a)]$

$$\sin^{2}\theta \frac{d\theta^{2}}{dt^{2}} = \frac{2g}{\lambda} \left[\sin^{2}\theta - 2\beta^{2} (\cos \theta - \cos a) \right]$$

$$(\cos \theta - \cos a)$$
 (6)

and the first equation (4) becomes

$$\sin^2\theta \frac{d\psi}{dt} = 2\beta \sqrt{\frac{g}{\lambda}} (\cos \theta - \cos \alpha)$$
 (7)

Equation (6) would, if integrated, give the value of θ in terms of the time: that is, the inclination which the axis of figure makes at any moment with the vertical; while eq. (7) (after substituting the ascertained value of θ) would give the value of ψ and hence determines the progressive movement of the body about the vertical Oz.

^{*} The length of the simple pendulum is (see Bartlett's Mech., p. 252) $\lambda = \frac{k_1^2 + \gamma^2}{\gamma}$. The moment of inertia $A = M(k_1^2 + \gamma^2)$; hence $\frac{A}{M\gamma} = \lambda$.

These equations in the above general form, have not been integrated;* nevertheless they furnish the means of obtaining all that we desire with regard to gyroscopic motion, and in particular that self-sustaining power, which it is the particular object of our analysis to explain.

In the first place, from eq. (6), by putting $\frac{d\theta}{dt}$ equal to zero, we can obtain the maximum and minimum values of θ . This diff. coefficient is zero, when the factor $\cos \theta - \cos \alpha = 0$, that is, when $\theta = \alpha$; and this is a maximum, for it has just been shown from equations (4) that θ cannot exceed α . It will be zero also and θ a minimum when

$$\sin^2\theta - 2\beta^2(\cos\theta - \cos\alpha) = 0$$
or
$$\cos\theta = -\beta^2 + \sqrt{1 + 2\beta^2\cos\alpha} + \beta^4$$
 (8)

^{*} The integration may be effected by the use of elliptic functions; but the process is of no interest in this discussion.

[†]It is easy to show that this value of θ belongs to an actual minimum; but it is scarcely worth while to introduce the proof.

(The positive sign of the radical alone applies to the case, since the negative one would make θ a greater angle than α)

It is clear that (α being given) the value of θ depends on β alone, and that it can never become zero unless β is zero; and as long as the impressed rotary velocity n is not itself zero (however minute it may be), β will have a finite value.

Thus, however minute may be the velocity of rotation, it is sufficient to prevent the axis of rotation from falling to a vertical position.

The self-sustaining power of the gyroscope when very great velocities are given is but an extreme case of this law. For, if β is very great, the small quantity $1-\cos^3\alpha$ may be subtracted from the quantity under the radical (eq. 8) without sensibly altering its value, which would cause that equation to become

$\cos \theta = \cos \alpha$

That is, when the impressed velocity n, and in consequence β is very great, the minimum value of θ differs from its max-

imum a by an exceedingly minute quantity.

Here then is the result, analytically found, which so surprises the observer, and for which an explanation has been so much sought and so variously given. The revolving body, though solicited by gravity, does not visibly fall.

Knowing this fact, we may assume that the impressed velocity n is very great, and hence $\cos \theta - \cos \alpha$ exceedingly minute, and on this supposition, obtain integrals of equations (6) and (7), which will express with all requisite accuracy the true gyroscopic motion. For this purpose, make

$$\theta = a - u,$$
 $d\theta = -du$

in which the new variable u is always extremely minute, and is the angular descent of the axis of figure below its initial elevation.

By developing and neglecting the powers of u superior to the square, we have

 $\sin^3 \theta = \sin^3 a - u \sin^2 2a + u^2 \cos^2 2a^2 \cos^2 \theta - \cos^2 a = u \sin^2 a - \frac{1}{2}u^2 \cos^2 a$

substituting these values in eq. 6, we get

$$\sqrt{\frac{g}{\lambda}}dt = \frac{du}{\sqrt{2u \sin a - u^2(\cos a + 4\beta^2)}}$$
.

 β having been assumed very great, cos. a

* By Stirling's theorem,

$$f(u) = U + U' \frac{u}{1} + U'' \frac{u^2}{1.2}$$
, &c.,

in which U, U, U'', &c, are the values of f(u) and its different coefficients when u is is made zero.

Making $f(u) = \sin^2(\alpha - u)$, and recollecting that sin. $2u = 2 \sin u \cos u$ and $\cos 2u = \cos^2 u - \sin^2 u$, we get the value of $\sin^2 \theta$; and making $f(u) = \cos(\alpha - u) - \cos \alpha$ the value in text of $\cos \theta - \cos \alpha$ is obtained.

† Eq. 6 may be written

$$\frac{\lambda}{g} \frac{d\theta^2}{dt^2} = 2(\cos \theta - \cos \alpha) - 4\beta^2 \frac{(\cos \theta - \cos \alpha)^2}{\sin \alpha^2 \theta}$$

By substituting the values just found of $d\theta$, $\sin^2 \theta$ and $\cos \theta - \cos \alpha$ and performing the operations indicated, neglecting the higher powers of u, (by which $\frac{(\cos \theta - \cos \cos^2 \theta)}{\sin^2 \theta}$ reduces simply to u^2) and deducing

the value $\sqrt{\frac{g}{\lambda}}dt$, the expression in the text is obtained.

may be neglected in comparison with $4\beta^2$ and the above may be written

$$\sqrt{\frac{g}{\lambda}}dt = \frac{du}{\sqrt{2u \sin_{\lambda} a - 4\beta^{2}u^{2}}}.$$
 (d)

Integrating and observing that u=o, when t=o, we have

$$\sqrt{\frac{g}{\bar{\lambda}}}.\;t\!=\!\frac{1}{2\beta}.\;\mathrm{arc}\!\left\{\cos.=\!1\!-\!\frac{4\beta^3u}{\sin.a}\right\}$$

(See Appendix, Note A.)

$$u = \frac{\sin a}{4\beta^2} \left(1 - \cos 2\beta \sqrt{\frac{g}{\bar{\lambda}} \cdot t} \right)$$

or, (since cos. $2a=1-2\sin^2 a$)

$$u = \frac{1}{2\beta^2} \sin a \sin^3 \beta \sqrt{\frac{\overline{g}}{\overline{\lambda}}} t$$
 (9)

Putting a-u in place of θ (equat. 7) neglecting square of u, we get

$$\frac{d\psi}{dt} = \frac{1}{\beta} \sqrt{\frac{g}{\bar{\lambda}}} \cdot \sin^3 \beta \sqrt{\frac{g}{\bar{\lambda}}} t \qquad (10)$$

(See Appendix, Note B.)

from which, observing that $\psi=0$, when t=0

$$\psi = \frac{1}{2\beta} \sqrt{\frac{g}{\lambda}} t - \frac{1}{4\beta^2} \sin\left(2\beta \sqrt{\frac{g}{\lambda}} t\right) \quad (11)$$

These three expressions (9), (10), (11), represent the vertical angular depression—the horizontal angular velocity—and the extent of horizontal angular motion of the axis of figure after any time t.*

The first two will reach their respective maxima and minima when sin. $\beta \sqrt{\frac{g}{\bar{\lambda}}t}$

=1 and =0; or when
$$t=\frac{\pi}{2\beta}\sqrt{\frac{\lambda}{\tilde{g}}}$$
 and $t=$

$$\frac{\pi}{\beta}\sqrt{\frac{\lambda}{g}}$$

These values of t in equation (11) give

$$\psi = \frac{\pi}{4\beta^2} \qquad \psi = \frac{\pi}{2\beta^2}$$

^{*} The assumption that $\psi=0$ when t is zero supposes that the initial position of the node coincides with the fixed axis of x. In my subsequent illustrations and analysis I suppose the initial position to be at 90° therefrom, which would require to the above value of ψ , the constant $1/4\pi$ to be added. The horizontal angular motion of the axis of figure is the same as that of the node.

Hence, counting from the commencement of motion, when t, u, $\frac{d\psi}{dt}$ and ψ are all zero, we have the following series of corresponding values of these variables

$$t = \frac{\pi}{2\beta} \sqrt{\frac{\lambda}{g}}, u = \frac{1}{2\beta^{3}} \sin a \frac{d\psi}{dt} = \frac{1}{\beta} \sqrt{\frac{g}{\lambda}}$$
$$\psi = \frac{\pi}{4\beta^{3}}$$

which correspond to the moment of greatest depression, when u and $\frac{d\psi}{dt}$ are maxima and

$$t = \frac{\pi}{\beta} \sqrt{\frac{\lambda}{g}}, \ u = 0, \frac{d\psi}{dt} = 0, \psi = \frac{\pi}{2\beta}$$

when, it appears (*u* being the zero), the axis of figure has regained its original elevation and the horizontal velocity is destroyed.

All these values are (owing to the assumed large value of β) very minute. If we suppose the rotating velocity n=100 π or 100 revolutions per second, the maximum of u (with an instrument of or-

dinary proportions) would be a fraction of a minute of arc, and the period of undulation but a fraction of a second.


Hence the horizontal motion about the point of support will be exceedingly slow compared with the axial rotation of the disk expressed by n.

If, in equations (9) and (10), we increase t indefinitely we will have but a repetition of the series of values already found, they being recurring functions of the time.

We see, then, the revolving body does not, in fact, maintain a uniform unchanging elevation, and move about its point of support at a uniform rate, (as it appears to do). But the axis of figure generates what may be called a corrugated cone, and any point of it would describe an undulating curve (Fig. 2) whose superior culminations a, a', a", &c., are cusps lying in the same horizontal plane, and whose sagittae cb, c'b',&c., are to the

amplitudes aa', a', a'' &c., as $\frac{\sin a}{2\beta^2}$: $\frac{\pi}{2\beta^2}$:

 $\sin \alpha$: π . If the initial elevation α is 90°,



this ratio is as the diameter to the circumference of the circle: a property which indicates the cycloid.

Assuming $a=90^{\circ}$ and sin. a=1, equations (9) and (10) will give, by elimination of $\sin^{2}\beta\sqrt{\frac{g}{1}t}$,

$$\frac{d\psi}{dt} = 2\beta\sqrt{\frac{g}{\tilde{\lambda}}}u \qquad \frac{dt = \frac{d\psi}{2\beta\sqrt{\frac{g}{\tilde{\lambda}}}u}}{2\beta\sqrt{\frac{g}{\tilde{\lambda}}u}},$$

substituting this value in eq. (d), we get

$$d\psi = \frac{2\beta u \, d \, u}{\sqrt{2u - 4\beta^2 u^2}} = \frac{u \, d \, u}{\sqrt{\frac{1}{2\beta^2} u - u^2}}$$

the differential equation of the cycloid generated by the circle whose diameter is $\frac{1}{2G^2}$

In this position of the axis, both the angles u and ψ are arcs of great circles described by a point of the axis of figure at a units distance from O, and owing to

their minuteness may be considered as rectilinear co-ordinates.

If a is not 90°, the sagittae $bc = \frac{1}{2\beta^0}$ sin. a; but then, while the angular motion ψ is the same, the arc described by the same point of the axis will be that of a small circle, whose actual length will likewise be reduced in the ratio of 1: sin.a. The curve is therefore a cycloid in all circumstances; and the axis of figure moves as if it were attached to the circumference of a minute circle whose diameter is $\frac{1}{2\beta^0}$ sin. a, which rolled along the horizontal circle, a a' a'', about the vertical through the point of support.

The center e of this little circle moves with uniform velocity. The first term of the value of ϕ (equation 11) is due to this uniform motion; it may be called the mean precession.

The second term is due to the circular motion of the axis about this center, and combined with the corresponding values of u, constitutes what may be called the nutation.

These cycloidal undulations are so minute—succeed each other with such rapidity (with the high degrees of velocity usually given to the gyroscope), that they are entirely lost to the eye, and the axis seems to maintain an unvarying elevation and move around the vertical with a uniform slow motion.

It is in omitting to take into account these minute undulations that nearly all popular explanations fail. They fail, in the first place, because they substitute, in the place of the real phenomenon, one which is purely imaginary and inexplicable, since it is in direct variance with fact and the laws of nature;—and they fail, because these undulations—(great or small, according as the impressed rotation is small or great) furnish the only true clue to an understanding of the subject.

The fact is, that the phenomenon exhibited by the gyroscope which is so striking, and for which explanations are so much sought, is only a particular and extreme phase of the motion expressed by equations (6) and (7)—that the self-sustaining power is not absolute, but one of degree—that, however minute the axial rotation may be, the body never will fall quite to the vertical;—however great, it cannot sustain itself without any depression

I have exhibited the undulations, as they exist with high velocities-when they become minute and nearly true cycloids; with low velocities they would occupy (horizontally) a larger portion of the arc of a semi-circle, and reach downward approximating, more or less nearly, to contact with the vertical; and, finally, when the rotary velocity is zero, their cusps are in diametrically opposite points of the horizontal circle, while the curves resolve themselves into vertical circular arcs which coincide with each other, and the vibration of the pendulum is exhibited. All these varieties of motion, of which that of the pendulum is one extreme phase and the gyroscopic another, are embraced in equations (6) and (7) and exhibited by varying β from 0 to high values, though (wanting general integrals to these equations) we cannot determine, except in these extreme cases, the exact elements of the undulations. The minimum value of θ may, however, always be determined by equation (8).

If we scrutinize the meaning of equations (6) and (7), it will be found that they represent, the first, the horizontal angular component of the velocity of a point at units distance from O, and the second the actual velocity of such point.*

^{*}In more general terms equations(4) express the first, that the moment of the quantity of motion about the fixed vertical axis 0z remains always constant; the second that the living forces generated in the body (over and above the impressed axial rotation) are exactly what is due to gravity through the height, h.

Both are expressions of truths that might have been anticipated; for gravity cannot increase the moment of the quantity of motion about an axis parallel to itself; while its power of generating living force by working through a given height, cannot be impaired.

Had we considered ourselves at liberty to assume them, however, the equations might have been got without the tedious analysis by which we have reached them.

For $\sin \theta \frac{d\psi}{dt}$ is the horizontal, and $\frac{d\theta}{dt}$ the vertical, component of this velocity. Calling the first v_h , and the second v_v , and the resultant v_s , and calling cos. $\theta - \cos a$ (which is the true height of fall), h, those equations may be written

$$v_h = \frac{\mathrm{C}n}{\mathrm{A}} \ \frac{h}{\sin \theta} \tag{e}$$

$$(v_h^2 + v_v^2) = v_s^2 = \frac{2g}{\lambda}h$$
 (f)

This velocity v_s (as a function of the height of fall) is exactly that of the compound pendulum, and is entirely independent of the axial rotation n. Hence (as we might reasonably suppose) rotary motion has no power to impair the work of gravity through a given height, in generating velocity; but it does have power to change the direction of that velocity. Its effect is precisely that of a material undulatory curve, which, deflecting the body's path from vertical descent, finally

directs it upward, and causes its velocity to be destroyed by the same forces which generated it.

And it may be remarked, that, were the cycloid we have described such a material curve, on which the axis of the gyroscope rested, without friction and without rotation, it would travel along this curve by the effect of gravity alone (the velocity of descent on the downward branch carrying it up the ascending one), with exactly the same velocity that the rotating disk does, through the combined effects of gravity and rotation.

Equation (a) expresses the horizontal velocity produced by the rotation.

If we substitute its value in the second we may deduce

$$v_v \operatorname{or} \frac{d\theta}{dt} = \sqrt{\frac{2g}{\lambda}} h - \frac{\mathrm{C}^2 n^2}{\mathrm{A}^2} \frac{h^2}{\sin^2 \theta}$$

If we take this value at the commencement of descent, and before any horizontal velocity is acquired (making h indefinitely small), the second term under the radical may be neglected, and the

first increment of descending velocity becomes $\sqrt{\frac{2g}{\lambda}}h$, precisely what is due to gravity, and what it would be were there no rotation.

Hence the popular idea that a rotating body offers any direct resistance to a change of its plane, is unfounded. It requires as little exertion of force (in the direction of motion) to move it from one plane to another, as if no rotation existed; and(as a corollary) as little expenditure of work.

But deflecting forces are developed, by angular motion given to the axis, and normal to its direction, which are very sensible, and are mistaken for direct resistances. If the extremity of the axis of rotation were confined in a vertical circular groove, in which it could move without friction; or if any similar fixed resistance, as a material vertical plane, were opposed to the deflecting force, the rotating disk would vibrate in the vertical plane as if no rotation existed. Its equation of motion would become that of the

compound pendulum,
$$\frac{d\theta}{dt} = \sqrt{\frac{2g}{\lambda}}h$$
. What

then is the resistance to a change of plane of rotation so often alluded to and described. A misnomer entirely.

The above may be otherwise established. If in equations (3) we introduce in the second member an indeterminate horizontal force, g', applied to the center of gravity, parallel to the fixed axis of y, and contrary to the direction in which, in our figure, we suppose the angle ψ to increase, the projections of this force on the axes Ox_1 , Oy_1 , will be a' g' and b' g' and the last two of these equations will become (calling cosines x_1 Oy and y_1Oy_1 a' and b',)

$$\mathbf{A} dv_y - (\mathbf{C} - \mathbf{A}) n v_x dt = \gamma \mathbf{M} (ag + a'g') dt$$

$$\mathbf{A} dv_x + (\mathbf{C} - \mathbf{A}) n v_y dt = -\gamma \mathbf{M} (bg + b'g') dt$$

Multiplying the first by v_y and the second by v_x and adding

$$\Lambda(v_y dv_y + v^x dv_x) = \gamma \mathbf{M}[g(av_y - bv_x)dt + g'(a'v_y - b'v_x)dt]$$

But $(av_y-bv_x)dt$ has been shown to be =d. $\cos \theta$,—and by a similar process it may be shown that $(a'v_y-b'v_x)dt=d$. (sin. θ cos. ψ). (For values of α' and b' as before.)

Let us suppose now that the force g' is such that the axis of the disk may be always maintained in the plane of its initial position xz. The angle ψ would always be 90°, $d\psi$ =0, and d.(sin. θ cos. ψ) =0. That is, the co-efficient of the new force g' becomes zero; and the integral of the above equation is as before,

$$\mathbf{A}(v_y^2 + v_x^2) = 2\gamma \mathbf{M}g \cos \theta + h.$$

But the value of $v_y^2 + v_x^2$ likewise reduces (since $\frac{d\psi}{dt} = 0$) to $\frac{d\theta^2}{dt^2}$ and the above becomes the equation of the compound pendulum $(g) \frac{d\theta^2}{dt^2} = \frac{2\gamma Mg}{A} \cos \theta + h = \frac{2g}{\lambda}$ (cos. $\theta - \cos a$), (h being determined.) This is the principle just before announced, that, with a force so applied as to prevent any deflection from the plane in which gravity tends to cause the axis to

vibrate, the motion would be precisely as if no axial rotation existed.

To determine the force of g'; multiply the first of preceding equations by b, and the second by a, and add the two, and add likewise $A(v_ydb+v_xda=-A\ nd\cos\theta$, and we shall get

$$Ad(bv_y + av_x) + C \ nd \cos \theta = \gamma Mg'$$

 $(a'b - ab')dt.$

By referring to the values of a,a',b,b', and performing the operations indicated and making cos. $\psi=0$, sin. $\psi=1$, the above becomes,

$$Ad(bv_y + av_x) + C \ nd \ \cos \theta = \gamma Mg' \sin \theta \ dt$$

But the value of $(bv_y + av_x)$ be-

comes zero when $\frac{d\psi}{dt} = o$. Hence,

$$g' = \frac{\text{C } nd \text{ cos. } \theta}{\gamma \text{M sin. } \theta \text{ } dt} = -\frac{\text{Cn } d \theta}{\gamma \text{M } dt} *$$

^{*} The effect of gravity is to diminish θ and the increment $d\theta$ is negative in the case we are considering. Hence the negative sign to the value of g', indicating

The second factor $\frac{d\theta}{dt}$ is the angular velocity with which the axis of rotation is moving.

Hence calling v_s that angular velocity, the value of the deflecting force, g' may be written (irrespective of signs),

$$g' = \frac{C}{\gamma M} n v_s. \tag{h}$$

that is, it is directly proportional to the axial rotation n, and to the angular velocity of the axis of that rotation. By putting for C,Mk^2 (in which k is the distance from the axis at which the mass M, if concentrated, would have the moment of inertia, C,) the above takes the simple form

$$g' = \frac{k^2}{\nu} n v_s.$$

In the case we have been considering above, in which g' is supposed to coun-

that the force is in the direction of the positive axis of y, as it should, since the tendency of the node is to move in the reverse direction.

teract the deflecting force of axial rotation, the angular velocity v_s or $-\frac{d^{\theta}}{dt}$ (equation g) is equal to $\sqrt{\frac{2g}{\overline{\lambda}}}$ (cos. θ -cos. a)

But in the case of the *free* motion of the gyroscope, this deflecting force combines with gravity to produce the observed movements of the axis of figure.

If, therefore, we disregard the axial rotation and consider the body simply as fixed at the point O, and acted upon, at the center of gravity, by two forces—one of gravity constant in intensity and direction—the other, the deflecting force due to an axial rotation n, whose variable intensity is represented by $\frac{C}{\gamma M}$ nv_s , and whose direction is always normal to the plane of motion of the axis; we ought, introducing these forces, and making the axial rotation n zero, in general equations (3), to be able to deduce therefrom the identical equations (4) which express the motion of the gyroscope.

This I have done; but as it is only a verification of what has previously been said, I omit in the text the introduction of the somewhat difficult analysis.

(See Appendix, Note C.)


Equation (5) becomes (in the case we consider), by integration;

$\varphi = nt + \psi \cos \alpha$

which, with the values of u and ψ already obtained, determines completely the position of the body at any instant of time.

Knowing now not only the exact nature of the motion of the gyroscope, but the direction and intensity of the forces which produce it, it is not difficult to understand why such a motion takes place.

Fig. 1 represents the body as supported by a point within its mass; but the analysis applies to any position, in the axis of figure, within or without; and Figs. 3 and 4 represent the more familiar cir-

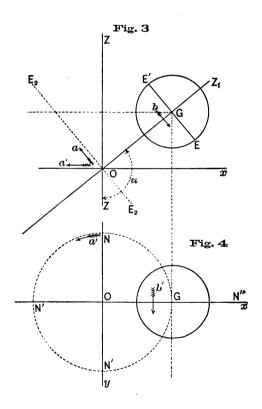

cumstances under which the phenomenon is exhibited.

Let the revolving body be supposed (Fig. 3, vertical projection), for simplicity of projection, an exact *sphere*, supported by a point in the axis prolonged at O, which has an initial elevation a greater than 90°. Fig. 4. represents the projection on the horizontal plane xy the initial position of the axis of figure (being in the plane of xz) is projected in Ox.

Ox, Oy, Oz, are the three (fixed in space) co-ordinate axes, to which the body's position is referred.


In this position, an initial and high velocity n is supposed to be given about the axis of figure Oz_1 , so that the visible portions move in the direction of the arrows b, b', and the body is left subject to whatever motion about its point of support O, gravity may impress upon it. Had it no axial rotation, it would immediately fall and vibrate according to the known laws of the pendulum. Instead of which, while the axis maintains

(apparently) its elevation a, it moves slowly around the vertical Oz, receding from the observer, or from the position ON" towards ON.

It is self-evident that the first tendency (and as I have likewise proved, the first effect) of gravity is to cause the axis Oz. to descend vertically, and to generate vertical angular velocity. But with this angular velocity, the deflecting force proportional to that velocity and normal to its direction, is generated, which pushes aside the descending axis from its vertical path. But as the direction of motion changes, so does the direction of this force-always preserving its perpendicularity. It finally acquires an intensity and upward direction adequate to neutralize the downward action of gravity; but the acquired downward velocity still exists and the axis still descends, at the same time acquiring a constantly increas. ing horizontal component, and with it a still increasing upward deflecting force. At length the descending component of velocity is entirely destroyed—the path

of the axis is horizontal; the deflecting force due to it acts directly contrary to gravity, which it exceeds in intensity, and hence causes the axis to commence rising. This is the state of things at the point b (Fig. 2). The axis has descended the curve ab, and has acquired a velocity due to its actual fall ad; but this velocity has been deflected to a horizontal direction. The ascent of the branch ba' is precisely the converse of its descent. The acquired horizontal velocity impels the axis horizontally, while the deflecting force due to it (now at its maximum) causes it to commence ascending. As the curve bends upward, the normal direction of this force opposes itself more and more to the horizontal, while gravity is equally counteracting the vertical velocity. As the horizontal velocity at b was due to a fall through the height ad, so, through the medium of this deflecting force, it is just capable of restoring the work gravity had expended and lifting the axis back to its original elevation at a', and the cycloidal undulation is completed, to be again and again repeated, and the axis of figure, performing undulations too rapid and too minute to be perceived, moves slowly around its point of support.

Referring to Fig. 3, the equator of the revolving body (a plane perpendicular to the axis of figure and through the fixed point O.) would be an imaginary plane E.E. Its intersection with the horizontal plane of xy would be the line of nodes N,N'. In the position delineated, the progression of the nodes is direct. For, at the acending node N, any point in the imaginary plane of the equator (suppoosed to revolve with the body) would move upwards in the direction of the arrow a, while the node moves in the same direction from O (of the arrow a'). Were the axis of figure below the horizontal plane, (Fig. 5) the upward rotation of the point would be from O to E, (as the arrow a), while the progression of the node (in the same direction as before as the arrow a') would be the reverse, and the motion of the node would be retro-



grade—yet in both cases the same in space.


As the deflecting force of rotary motion is the sole agent in diverting the vertical velocity produced by gravity from its downward direction, and in producing these paradoxical effects; and as the foregoing analysis, while it has determined its value, has thrown no light upon its origin, it may be well to inquire how this force is created.

Popular explanations have usually turned upon the deflection of the *vertical* components of rotary velocity by the vertical angular motion of the axis produced by gravity. In point of fact, however both vertical and horizontal components are deflected, one as much as the other; and the simplest way of studying the effects produced, is to trace a vertical projection of the path of a point of the body under these combined motions. For this purpose conceive the mass of the revolving disk concentrated in a single ring of matter of a radius k due to its moment of inertia $C=Mk^2$ (see Bartlett Mech. p.

178), and, for simplicity, suppose the angular motion of the axis to take place around the center figure and of gravity G.

Let AB be such a ring (supposed perpendicular to the plane of projection) revolving about its axis of figure, GC, while the axis turns in the vertical plane about the same point G. Let the rotation, be such that the visible portion of the disk moves upward through the semi-circumference, from B to A, while the axis moves downward through the angle θ to the position GC'. The point B, by its axial rotation alone, would be carried to A: but the plane of the disk, by simultaneous movement of the axis, is carried to the position A'B', and the point Barrives at B' instead of A, through the curve projected in BGB'. The equation of the projection, in circular functions, is easily made; but its general character is readily perceived, and it is sufficient to say that it passes through the point G,-that its tangents at B and B' are perpendicular to AB and A'B', -and that its concavity throughout its whole length turned to

the right. The point A descends on the other, or remote side of the disk, and makes an exactly similar curve AGA' with its concavity reversed.



The centrifugal forces due to the deflections of the vertical motions are normal to the concavities of these curves; hence, on the side of the axis towards the eye, they are to the left, and on the opposite or further side, to the right, (as the arrows b and a.) Hence the joint effect is to

press the axis GC from its vertical plane CGC', horizontally and towards the eye. Reverse the direction of axial rotation and the curves AA' and BB' will be the same except that AA' would be on the near and BB' on the remote side of the axis GC, and the direction of the resulting pressure will be reversed.

A projection on the horizontal plane would likewise illustrate this deflecting force and show at the same time that there is no resistance in the plane of motion of the axis, and that the whole effect of these deflections of the paths of the different material points, is a mere interchange of living forces between the different material points of the disk; but it is believed that the foregoing illustration is sufficient to explain the origin of this force, whose measure and direction I have analytically demonstrated.

It may be remarked, however, that the intensity of the force will evidently be directly as the velocities gained and lost in the motion of the particles from one

side of the axis to the other; or as the angular velocity of the axis, and as the distance, k, of the particles from that axis. It will also be as the number of particles which undergo this gain and loss of living force in a given time; or as the velocity of axial rotation. Considered as applied normally at G to produce rotation about any fixed point O in the axis, its intensity will evidently be directly as the arm of lever k, and inversely as the distance of G from O (γ) . Hence the measure of this force already found, from analysis,

$$g' = \frac{k^2}{\gamma} n v_s.$$

In the foregoing analysis, the entire ponderable mass is supposed to partake of the impressed rotation about the axis of figure Oz_1 ; and such must be the case im order that the results we have arrived at may rigidly apply. Such, however, cannot be the case in practice. A portion of the instrument must consist of mountings which do not share in the rotation of the disk. It is believed the analysis will apply to this case by simply in-

cluding the whole mass, in computing the moment of inertia A and the mass M, while the moment C represents, as before, that of the disk alone.

In this manner it would be easy to calculate what amount of extraneous weight (with an assumed maximum depression u) the instrument would sustain, with a given velocity of rotation.

The analogy between the minute motions of the gyroscope and that grand phenomenon exhibited in the heavens,—the "precession of the equinoxes"—is often remarked. In an ultimate analysis, the phenomena, doubtless, are identical; yet the immediate causes of the latter are so much more complex, that it is difficult to institute any profitable comparison.

At first sight the undulatory motion attending the precession, known as "nutation" (nodding) would seem identical with the undulations of the gyroscope. But the identity is not easily indicated; for the earth's motion of nutation is mainly governed by the moon, with whose cycles it coincides; and the

solar and lunar precessions and nutations are so combined, and affected by causes which do not enter into our problem, that it is vain to attempt any minute identification of the phenomena, without reference to the difficult analysis of cdestial mechanics.

On a preceding page I said that a horizontal motion of the rotating disk around its point of support, without descending undulations, was at variance with the laws of nature. This assertion applied, however, only to the actual problem in hand, in which no other external force than gravity was considered, and no other initial velocity than that of axial rotation.

Analysis shows, however, that an initial *impuls* may be applied to the rotating disk in such a way that the horizontal motion shall be absolutely without undulation. An initial horizontal angular velocity, such as would make its corresponding deflective force equal to the component of gravity, g sin. θ , would

cause a horizontal motion without undulation.

If the axial rotation n, as well as the horizontal rotation, is communicated by an impulsive force, analysis shows that it may be applied in any plane intersecting the horizontal plane in the line of nodes; but if applied in the plane of the equator (where it can communicate nothing but an axial rotation n), or in the horizontal plane, its intensity must be infinite.

My announced object does not carry me further into the consideration of the gyroscope than the solution of this peculiar phenomenon, which depends solely upon, and is so illustrative of, the laws of rotary motion.

If I have been at all successful in making this so often explained subject more intelligible—in giving clearer views of some of the supposed effects of rotation, it has been because I have trusted solely to the only safe guide in the complicated phenomena of nature, analysis.

APPENDIX.—Note A.

 $\frac{du}{\sqrt{2u \sin a - 4\beta^2 u^2}}$ may be put in the

$$form \frac{2\beta}{\sin \cdot a} \sqrt{\frac{\frac{\sin \cdot a}{4\beta^2} du}{2u \frac{\sin \cdot a}{4\beta^2} - u^2}}$$

Call $\frac{\sin a}{4\beta^*}$ =R, and the integral of the 2d factor of the above is the arc whose radius is R and versed sine is u^* ; or whse cosine is R-u, or it is R times the arc whose cosine $1-\frac{u}{R}$ with radius unity. Substituting the value of R in the integral and multiplying by the factor $\frac{2\beta}{\sin a}$ we get the value of $\sqrt{\frac{g}{\lambda}}t$, of the text.

NOTE B.

In eq. (7) if we divide both members by $\sin^2 \theta$, and, in reducing the fraction $\frac{\cos \theta - \cos \alpha}{\sin^2 \theta}$, use the values already

found and neglect the square, as well as higher powers u, (which may be done without sensible error, owing to the minuteness of u, though it could not be done in the foregoing values of dt and t, since the co-efficient $4\beta^2$ in those values, is reciprocally great, as u is small) the quo-

tient will be simply $\frac{u}{\sin a}$

Substituting the value of u and dividing out sin. a, we get the value of $\frac{d\psi}{dt}$ in the text.

The integral of $\sin^2\beta\sqrt{\frac{g}{\lambda}}tdt$ results from the formula $/\sin^2\varphi d\varphi = \frac{1}{2}\varphi - \frac{1}{4}\sin^2\varphi$, easily obtained by substituting for $\sin^2\varphi$, its value $\frac{1}{2} - \frac{1}{2}\cos^2\varphi$.

NOTE C.

To introduce these forces in Eq. (3) I observe, first, that as both are applied at G (in the axis Oz_1) the moment L_1 is still zero and the *first* eq. becomes, as before

$$Cdv_z = O \text{ or } v_z = \text{const.}$$

And as we disregard the impressed axial rotation, we make this constant (or v_z) zero.

The deflecting force $\frac{Cn}{\gamma M}v_s$ (taken with contrary sign to the counteracting force just obtained) resolves itself into two components $\frac{Cn}{\gamma M}\frac{d\theta}{dt}$ and $-\frac{Cn}{\gamma M}\frac{d\psi}{dt}$ sin. θ , the first in a horizontal, the second in a vertical plane, and both normal to the axis of figure.

The second is opposed to gravity, whose component normal to the axis of figure is $g \sin \theta$.

Hence we have the two component forces (in the directions above indicated),

$$\mathbf{M}.\frac{\mathbf{C}n}{\gamma\mathbf{M}}\,\frac{d\,\theta}{dt}\text{and}\,\,\mathbf{M}\Big(g-\frac{\mathbf{C}n}{\gamma\mathbf{M}}\,\frac{d\psi}{dt}\Big)\text{sin,}\,\,\theta.$$

These moments with reference to the axes of y, and x, will be

—sin.
$$\varphi \gamma \mathbf{M} \left(g - \frac{\mathbf{C}n}{\gamma \mathbf{M}} \frac{d\psi}{dt} \right)$$
 sin. θ —

cos. $\varphi \gamma \mathbf{M} \frac{\mathbf{C}n}{\gamma \mathbf{M}} \frac{d\theta}{dt}$, and

cos.
$$\varphi_{\gamma} \mathbf{M} \left(g - \frac{\mathbf{C}n}{\gamma \mathbf{M}} \frac{d\psi}{dt} \right) \sin \theta - \sin \varphi_{\gamma} \mathbf{M} \frac{\mathbf{C}n}{\gamma \mathbf{M}} \frac{d\theta}{dt}$$

Hence equations (3) (making v_z zero, and putting for M, and N, the above values, and recollecting the values of a and b, become

$$\left. \begin{array}{l} \mathbf{A} dv_y = a_\gamma \mathbf{M} g dt - \\ a \mathbf{C} n \frac{d\psi}{dt} dt - \mathbf{C} n \ \cos. \ \varphi \frac{d \ \theta}{dt} dt \\ \mathbf{A} dv_x = -b_\gamma \ \mathbf{M} g dt + \\ b \mathbf{C} n \frac{d\psi}{dt} dt - \mathbf{C} n \ \sin. \ \varphi \frac{d \ \theta}{dt} \ dt \end{array} \right\} i$$

Multiplying the equations severally by v_y and v_x , adding and reducing, we get

$$\begin{split} & \mathbf{A}(v_y \ dv_y + v_x \ dv_x) = \gamma \mathbf{M} g d. \cos \theta - \\ & \mathbf{C} n \frac{d\psi}{dt} d. \cos \theta - \mathbf{C} n d \theta \left(v_y \cos \psi + v_x \sin \varphi \right) \end{split}$$

But v_y cos. $\varphi + v_x$ sin. φ will be found equal to sin. $\theta \frac{d\psi}{dt}$ (by substituting the values of v_y and v_x); hence the two last terms destroy each other, and the above equation becomes identical with equation (a) from which the 2d eq. (4) is deduced.

Multiplying the 1st equation (i) by cos. φ and the second by sin. φ and adding, we get

By differentiating the values of v_y and v_x , performing the multiplications, and substituting for $d\varphi$ its value, cos. $\theta d\psi$, (proceeding from the 3d equation (2) when $v_z = 0$), the above becomes

$$A\left(\sin \theta \frac{d^{2}\psi}{dt^{3}} + 2\cos \theta \frac{d\psi}{dt} \frac{d\theta}{dt}\right) = -Cn\frac{d\theta}{dt}$$

Multiplying both members by sin. θdt , and integrating, the above becomes

$$\sin^2 \theta \frac{d\psi}{dt} = \frac{Cn}{A} \cos \theta + l;$$

the same as the 1st equation (4) when the value of the constant l is determined.

VALUABLE SCIENTIFIC BOOKS

PUBLISHED BY

D. VAN NOSTRAND,

23 MURRAY STREET AND 27 WARREN STREET, N. Y.

ADAMS (J. W.) Sewers and Drains for Populous Districts. Embracing Rules and Formulas for the dimensions and construction of works of Sanitary Engineers. Second edition. 800, cloth
ALEXANDER (J. H.) Universal Dictionary of Weights and Measures, Ancient and Modern, reduced to the standards of the United States of America. New edition, enlarged. 8vo, cloth
ATWOOD (GEO.) Practical Blow-Pipe Assaying. 12mo, cloth, illustrated 200
AUCHINCLOSS (W. S.) Link and Valve Motions Simplified. Illustrated with 37 wood-cuts and 21 lithographic plates, together with a Trayel Scale and numerous useful tables. 8vo, cloth
AXON (W. E. A.) The Mechanic's Friend; a Collection of Receipts and Practical Suggestions Relating to Aquaria—Bronzing—Cements—Drawing—Dyes—Electricity—Gilding—Glass-working—Glues—Horology—Lacquers—Locomotives—Magnetism—Metal-working—Modelling—Photography—Pyrotechny—Railways—Solders—Steam—Engine—Telegraphy—Taxidermy—Varnishes—Waterproofing, and Miscellaneous Tools, Instruments, Machines, and Processes connected with the Chemical and Mechanic Arts, With numerous diagrams and wood-cuts. Fancy cloth
BACON (F. W) A Treatise on the Richards Steam-Engine Indicator, with directions for its use. By Charles T. Perter. Revised, with notes and large additions as developed by American practice; with an appendix containing useful formulæ and rules for engineers. Illustrated. Third edition. 12mo, cloth

BARBA (J.) The Use of Steel for Constructive Purposes; Method of Working, Applying, and Testing Plates and Brass. With a Preface by A. L. Holley, C.E. 12mo, cloth.81 50
BARNES (Lt. Com. J. S., U. S. N.) Submarine Warfare, often- sive and defensive, including a discussion of the offensive Torpedo System, its effects upon Iron-Clad Ship Systems and influence upon future naval wars. With twenty litho- graphic plates and many wood-cuts. Box, cloth
BEILSTEIN (F.) An Introduction to Qualitative Chemical Analysis, translated by I. J. Osbun. 12mo, cloth
BENET (Gen. S. V., U. S. A.) Electro-Ballistic Machines, and the Schultz Chronoscope. Illustrated. Second edition, 4to, cloth
BLAKE (W. P.) Report upon the Precious Metals ? Being Statistical Notices of the principal Gold and Silver producing regions of the World, represented at the Paris Universal Exposition. 8vo, cloth
— Ceramic Art. A Report on Pottery, Porcelain, Tiles, Terra Cotta, and Brick. 8vo, cloth
BOW (R. H.) A Treatise on Bracing, with its application to Bridges and other Structures of Wood or Iron. 156 illustra- tions. 8vo, cloth
BOWSER (Prof. E. A.) An Elementary Treatise on Analytic Geometry, embracing Plane Geometry, and an Introduction to Geometry of three Dimensions. 12mo, cloth
BURGH (N. P.) Modern Marine Engineering, applied to Paddle and Screw Propulsion. Consisting of 36 colored plates, 259 practical wood-cut illustrations, and 493 pages of descriptive matter, the whole being an exposition of the present practice of James Watt & Co., I. & G. Rennie, R. Napier & Sons, and other celebrated firms. Thick 4to vol., cloth.
BURT (W. A.) Key to the Solar Compass, and Surveyor's Companion; comprising all the rules necessary for use in the field; also description of the Linear Surveys and Public Land System of the United States, Notes on the Barometer, suggestions for an outfit for a survey of four months, etc. Second edition. Pocket-book form, tuck
BUTLER (Capt. J. S., U. S. A.) Projectiles and Rifled Cannon. A Critical Discussion of the Principal Systems of Rifling and Projectiles, with Practical Suggestions for their Improvement, as embraced in a Report to the Chief of Ordnance, U. S. A. 36 plates. 4 to, cloth

D. VAN NOSTRAND'S PUBLICATIONS.	3
CAIN (Prof. WM.) A Practical Treatise on Voussoir and Solid and Braced Arches. 16mo, cloth extra	75
CALDWELL (Prof. GEO. C.) and BRENEMAN (Prof. A. A.) Manual of Introductory Chemical Practice, for the use of Students in Colleges and Normal and High Schools. Third edition, revised and corrected. 8vo, cloth, illustrated. New and enlarged edition.	50
CAMPIN (FRANCIS). On the Construction of Iron Roofs. 8vo, with plates, cloth	00
CHAUVENET (Prof. W.) New method of correcting Lunar Distances, and improved method of finding the error and rate of a chronometer, by equal altitudes. Evo, cloth 2	00
CHURCH (JOHN A.) Notes of a Metallurgical Journey in Europe. 8vo, cloth	00
CLARK (D. KINNEAR, C.E.) Fuel: Its Combustion and Economy, consisting of Abridgments of Treatise on the Combustion of Coal and the Prevention of Smoke, by C. W. Williams; and the Economy of Fuel, by T. S. Prideaux. With extensive additions on recent practice in the Combustion and Economy of Fuel: Coal, Coke, Wood, Peat, Petroleum, etc. 12mo, cloth	50
A Manual of Rules, Tables, and Data for Mechanical Engineers. Based on the most recent investigations. Illustrated with numerous diagrams. 1,012 pages. 8vo, cloth 7 Half morocco	50
CLARK (Lt. LEWIS, U. S. N.) Theoretical Navigation and Nautical Astronomy. Illustrated with 41 wood-cuts. 8vo, cloth	50
CLARKE (T. C.) Description of the Iron Railway Bridge over the Mississippi River at Quincy, Illinois. Illustrated with 21 lithographed plans. 4to, cloth	50
CLEVENGER (S. R.) A Treatise on the Method of Government Surveying, as prescribed by the U. S. Congress and Commissioner of the General Land Office, with complete Mathematical, Astronomical, and Practical Instructions for the use of the United States Surveyors in the field. 16mo, morocco	50
COFFIN (Prof J. H. C.) Navigation and Nautical Astronomy, Prepared for the use of the U. S. Naval Academy.	50

COLBURN (ZERAH). The Gas-Works of London. 12mo, boards. 60
COLLINS (JAS. E.) The Private Book of Useful Alloys and Memoranda for Goldsmiths, Jewellers, etc. 18mo, cloth... 50

CORNWALL (Prof. H. B.) Manual of Blow-Pipe Analysis, Qualitative and Quantitative, with a Complete System of Descriptive Mineralogy. 8vo, cloth, with many illustra- tions. N. Y., 1882
CRAIG (B. F.) Weights and Measures. An account of the Decimal System, with Tables of Conversion for Commer- cial and Scientific Uses. Square 3zme, limp cloth
CRAIG (Prof. THOS.) Elements of the Mathematical Theory of Fluid Motion, 16mo, cloth
DAVIS (C. B.) and RAE (F. B.) Hand-Book of Electrical Diagrams and Connections. Illustrated with 32 full-page illustrations. Second edition. Oblong 8vo, cloth extra
DIEDRICH (JOHN). The Theory of Strains: a Compendium for the Calculation and Construction of Bridges, Roofs, and Cranes. Illustrated by numerous plates and diagrams. 8vo, Cloth. 500
DIXON (D. B.) The Machinist's and Steam-Engineer's Practical Calculator. A Compilation of useful Rules, and Problems Arithmetically Solved, together with General Information applicable to Shop-Tools, Mill-Gearing, Fulleys and Shafts, Steam-Boilers and Engines. Embracing Valuable Tables, and Instruction in Screw-cutting, Valve and Link Motion, etc. 16mo, full morocco, pocket form(In press)
DODD (GEO.) Dictionary of Manufactures, Mining, Machinery, and the Industrial Arts. 12mo, cloth
DOUGLASS (Prof. S. H.) and PRESCOTT (Prof. A. B.) Qualitative Chemical Analysis. A Guide in the Practical Study of Chemistry, and in the Work of Analysis. Third edition. 8vo, cloth
DUBOIS (A. J.) The New Method of Graphical Statics. With 60 illustrations. 8vo, cloth
EASSIE (P.B.) Wood and its Uses. A Hand-Book for the use of Contractors, Builders, Aschitects, Engineers, and Timber Merchants. Upwards of 250 illustrations. 8vo, cloth. 1 50
EDDY (Prof. H. T.) Researches in Graphical Statics, embrac- ing New Constructions in Graphical Statics, a New General Method in Graphical Statics, and the Theory of Internal Stress in Graphical Statics. 8vo, cloth
ELIOT (Prof. C. W.) and STORER (Prof. F. H.) A Compendious Manual of Qualitative Chemical Analysis. Revised with the co-operation of the authors. By Prof. William R. Nichols. Illustrated. 12mo, (oth
ELLIOT (Maj. GEO. H., U. S. E.) European Light-House Systems. Being a Report of a Tour of Inspection made in 1873. 51 engravings and 21 wood-cuts. 8vo, cloth

ENGINEERING FACTS AND FIGURES. An Annual Register of Progress in Mechanical Engineering and Construction for the years 1892-64-65-66-07-88. Fully illustrated. 6 vols. 18mo, cloth (each volume sold separately), per vol
FANNING (J. T.) A Practical Treatise of Water-Supply Engineering. Relating to the Hydrology, HydroJynamics, and Practical Construction of Water-Works in North America. Third edition, With numerous tables and 186 illustrations. 650 pages. 8vo, cloth
FISKE (BRADLEY A., U. S. N.) Electricity in Theory and Practice. 8vo, cloth
FOSTER (Gen. J. G., U. S. A.) Submarine Blasting in Boston Harbor, Massachusetts. Removal of Tower and Corwin Rocks. Illustrated with seven plates. 4to, cloth 3 50
FOYE (Prof. J. C.) Chemical Problems, With brief Statements of the Principles involved. Second edition, revised and enlarged. 16mo, boards
FRANCIS (JAS. B., C.E.) Lowell Hydraulic Experiments: Being a selection from Experiments on Hydraulic Motors, on the Flow of Water over Weirs, in Open Canals of Uni- form Rectangular Section, and through submerged Orifices and diverging Tubes. Made at Lowell, Massachusetts, Fourth edition, revised and enlarged, with many new ex- periments, and illustrated with twenty-three copperplate engravings, 4to, cloth
FREE-HAND DRAWING. A Guide to Ornamental Figure and Landscape Drawing. By an Art Student, 18mo, boards
GILLMORE (Gen. Q. A.) Treatise on Limes, Hydraulic Cements, and Mortars. Papers on Practical Engineering, U. S. Engineer Department, No. 9, containing Reports of numerous Experiments conducted in New York City during the years 1888 to 1861, inclusive. With numerous illustrations. 8 vo. cloth
Report on Strength of the Building Stones in the United States, etc. 8vo, illustrated, cloth
GOODEVE (T. M.) A Text-Book on the Steam-Engine. 143 illustrations. 12mo, cloth
GORDON (J. E. H.) Four Lectures on Static Induction. 12mo, cloth

GRUNER (M. 1.) The Manufacture of Steel. Translated from the French, by Lenox Smith, with an appendix on the Bessemer process in the United States, by the translator, Illustrated, 8vo, cloth	50
HALF-HOURS WITH MODERN SCIENTISTS: Lectures and Essays. By Professors Huxley, Barker, Stirling, Cope, Tyndall, Wallace, Roscoe, Huggins, Lockyer, Young, Mayer, and Reed. Being the University Series bound up. With a general introduction by Noah Porter, President of Yale College. 2 vols. 12mo, cloth, illustrated	50
HAMILTON (W. G.) Useful Information for Railway Men. Sixth edition, revised and enlarged 562 pages, pocket form. Morocco, gilt.	00
HARRISON (W. B.) The Mechanic's Tool Book, with Practical Rules and Suggestions for Use of Machinists, Iron-Workers, and others. Illustrated with 44 engravings.	50
HASKINS (C. H.) The Galvanometer and its Uses. A Man- ual for Electricians and Students. Second edition. 12mo, morocco.	
HENRICI (OLAUS). Skeleton Structures, especially in their application to the Building of Steel and Iron Bridges. With folding plates and diagrams. 8vo, cloth	50
HEWSON (WM.) Principles and Practice of Embanking Lands from River Floods, as applied to the Levees of the Mississippi. 8vo, cloth	00
HOLLEY (ALEX. L.) A Treatise on Ordnance and Armor, embracing descriptions, discussions, and professional opinions concerning the materials, fabrication, requirements, capabilities, and endurance of European and American Guns, for Naval, Sea-Coast, and Iron-Clad Warfare, and their Rifling, Projectiles, and Breech-Loading; also, results of experiments against armor, from official records, with an appendix referring to Gun-Cotton, Hooped Guns, etc., etc., q45 pages, 493 engravings, and 147 Tables of Results, etc. 8vo, half roan.	000
Railway Practice American and European Railway Practice in the economical Generation of Steam, including the Materials and Construction of Coal-burning Boilers, Combustion, the Variable Blast, Vaporization, Circulation, Superheating, Supplying and Heating Feed-water, etc., and the Adaptation of Wood and Coke-burning Engines to Coal-burning; and in Permanent Way, including Road-bed, Sleepers, Rails, Joint-fastenings, Street Railways, etc., etc. With 77 lithographed plates. Folio, cloth	
HOWARD (C. R.) Earthwork Mensuration on the Basis of the Prismoidal Formule. Containing simple and labor- saving method of obtaining Prismoidal Contents directly	

from End Areas. Illustrated by Examples, and accompanied by Plain Rules for Practical Uses. Illustrated. 8vo, cloth
INDUCTION-COILS. How Made and How Used. 63 illustrations. 16mo, boards
ISHERWOOD (B. F.) Engineering Precedents for Steam Machinery. Arranged in the most practical and useful manner for Engineers, With illustrations, Two volumes in one. 8vo, cloth
JANNETTAZ (EDWARD). A Guide to the Determination of Rocks: being an Introduction to Lithology. Translated from the French by G. W. Plympton, Professor of Physical Science at Brooklyn Polytechnic Institute, 12mo, cloth 1 50
JEFFERS (Capt. W. N., U. S. N.) Nautical Surveying. Illustrated with 9 copperplates and 31 wood-cut illustrations.
JONES (H. CHAPMAN). Text-Book of Experimental Organic Chemistry for Students. 18mo, cloth 1 00
JOYNSON (F. H.) The Metals used in Construction: Iron, Steel, Bessemer Metal, etc., etc. Illustrated. 12mo, cloth. 75 — Designing and Construction of Machine Gearing. Illustrated 8vo, cloth. 200
KANSAS CITY BRIDGE (1HE). With an account of the Regimen of the Missouri River, and a description of the methods used for Founding in that River. By O. Chanute, Chief-Engineer, and George Morrison, Assistant-Engineer. Illustrated with five lithographic views and twelve plates of plans. 4to, cloth
KING (W. H.) Lessons and Practical Notes on Steam, the Steam-Engine, Propellers, etc., etc., for young Marine En- gineers, Students, and others. Revised by Chief-Engineer J. W. King, U. S. Navy. Nineteenth edition, enlarged.
KIRKWOOD (JAS. P.) Report on the Filtration of River Waters for the supply of Cities, as practised in Europe, made to the Board of Water Commissioners of the City of St. Louis. Illustrated by 30 double-plate engravings. 4to, cloth
LARRABEE (C. S.) Cipher and Secret Letter and Telegraphic Code, with Hogg's Improvements. The most perfect secret code ever invented or discovered. Impossible to read without the key. 18mo, cloth
LOCK (C. G.), WIGNER (G. W.), and HARLAND (R. H.) Sugar Growing and Refining. Treatise on the Culture of Sugar-Vielding Plants, and the Manufacture and Refining of Cane, Beet, and other sugars. 8vo, cloth, illustrated , 12 00

LOCKWOOD (THOS. D.) Electricity, Magnetism, and Electro-Telegraphy. A Practical Guide for Students, Operators, and Inspectors, 8vo, cloth\$2 90
LORING (A. E.) A Hand-Book on the Electro-Magnetic Telegraph. graph. 50 Cloth. 75 Morocco. 1 00
MacCORD (Prof. C. W) A Practical Treatise on the Slide- Valve by Eccentries, examining by methods the action of the Eccentricupon the Slide-Valve, and explaining the prac- tical processes of laying out the movements, adapting the valve for its various duties in the steam-engine. Second edi- tion Illustrated. 4to, cloth
McCULLOCH (Prof. R S.) Elementary Treatise on the Me- chanical Theory of Heat, and its application to Air and Steam Engines. 8vo, cloth
MERRILL (Col. WM. E. U. S. A.) Iron Truss Bridges for Railroads. The method of calculating strains in Trusses, with a careful comparison of the most prominent Trusses, in reference to economy in combination, etc., etc. Hustrated, 4to, cloth
MICHAELIS (Capt. O. E., U. S. A.) The Le Boulenge Chronograph, with three lithograph folding plates of illus- trations. 4to, cloth
MICHIE (Prof. P. S.) Elements of Wave Motion relating to Sound and Light. Text-Book for the U.S. Military Academy. 8vo, cloth, illustrated
MINIFIE (WM.) Mechanical Drawing. A Text-Book of Geometrical Drawing for the use of Mechanics and Schools, in which the Definitions and Rules of Geometry are familiarly explained; the Practical Problems are arranged, from the most simple to the more complex, and in their description technicalities are avoided as much as possible. With Illustrations for Drawing Plans, Sections, and Elevations of Railways and Machinery; an Introduction to Isometrical Drawing, and an Essay on Linear Perspective and Shadows, Illustrated with over 200 diagrams engraved on steel. Ninth edition. With an Appendix on the Theory and Application of Colors. 8vo, cloth. The Color of Colors of Colors of Colors. Property of Colors of Colors. Seed on Drawing that we have ever seen, and is especially a text-book of Geometrical Drawing for the use of Mechanics and Schools. No young Mechanic, such as a Machinist, Engineer, Cabinet-maker, Millwright, or Carpenter, should be without it."—Scientific American.
 Geometrical Drawing. Abridged from the octavo edition, for the use of schools. Illustrated with forty-eight steel plates. Fifth edition. 12mo, cloth

MODERN METEOROLOGY. A Series of Six Lectures, de- livered under the auspices of the Meteorological Society in 1878. Illustrated. 12mo, cloth
MORRIS (E.) Easy Rules for the Measurement of Earthworks, by Means of the Prismoidal Formula. 78 illustrations. 8vo, cloth
MOTT (H. A., Jr.) A Practical Treatise on Chemistry (Qualitative and Quantitative Analysis), Stoichiometry, Blow-pipe Analysis, Mineralogy, Assaying, Pharmaceutical Preparations, Human Secretions, Specific Gravities, Weights and Measures, etc., etc., etc., New edition, 1883. 650 pages. 8vo, cloth
NAQUET (A.) Legal Chemistry. A Guide to the Detection of Poisons, Falsification of Writings, Adulteration of Alimentary and Pharmaceutical Substances, Analysis of Ashes, and examination of Hair, Coins, Arms, and Stains, as applied to Chemical Jurisprudence, for the use of Chemists, Physicians, Lawyers, Pharmacists, and Experts. Translated, with additions, including a list of books and Memoirs on Toxicology, etc., from the French. By J. P. Battershall, Ph.D., with a preface by C. F. Chandler, Ph.D., M.D., L.D. 1 2mo, cloth
NOBLE (W. H.) Useful Tables. Pocket form, cloth 50
NUGENT (E.) Treatise on Optics; or, Light and Sight, theoretically and practically treated, with the application to Fine Art and Industrial Pursuits. With 103 illustrations.
PEIRCE (B.) System of Analytic Mechanics. 4to, cloth 10 00
PLANE ABLE (THE). Its Uses in Topographical Surveying. From the Papers of the U.S. Coast Survey. Illustrated. 200 "This work gives a description of the Plane Table employed at
the U. S. Coast Survey office, and the manner of using it."
PLATTNER, Manual of Qualitative and Quantitative Analysis with the Blow-Pipe. From the last German edition, revised and enlarged. By Prof. Th. Richter, of the Royal Saxon Mining Academy. Translated by Prof. H. B. Cornwall, assisted by John H. Caswell. Illustrated with 8y woodcuts and one lithographic plate. Fourth edition, revised, 560 pages. 8vo, cloth
PLYMPTON (Prof. GEO. W.) The Blow-Pipe. A Guide to its
use in the Determination of Salts and Minerals. Compiled from various sources. 12mo, cloth 1 50 — The Aneroid Barometer: Its Construction and Use. Compiled from several sources, 16mo, boards, illustrated, 50 Morocco

PLYMPTON (Prof. GEO. W.) The Star-Finder, or Plani- sphere, with Movable Horizon Printed in colors on fine card-board, and in accordance with Proctor's Star Atlas (\$1 00)
POCKET LOGARITH MS, to Four Places of Decimals, including Logarithms of Numbers, and Logarithmic Sines and Tangents to Single Minutes. To which is added a Table of Natural Sines, Tangents, and Co-Tangents. 16mo, boards, Morocco
POOK (S. M.) Method of Comparing the Lines and Draught- ing Vessels propelled by Sail or Steam. Including a chap- ter on Laying-off on the Mould-Loft Floor. 1 vol. 8vo, with illustrations, cloth
POPE (F. L.) Modern Practice of the Electric Telegraph, A Hand-Book for Electricians and Operators. Eleventh edi- tion, revised and enlarged, and fully illustrated. 8vo, cloth. 200
PRESCOTT (Prof. A. B.) Outlines of Proximate Organic Analysis, for the Identification, Separation, and Quantitative Determination of the more commonly occurring Organic Compounds. 12mo, cloth
Chemical Examination of Alcoholic Liquors. A Manual of the Constituents of the Distilled Spirits and Fermented Liquors of Commerce, and their Qualitative and Quantitative Determinations. 12mo, cloth
First Book in Qualitative Chemistry. Second edition.
PYNCHON (Prof. T. R.) Introduction to Chemical Physics, designed for the use of Academies, Colleges, and High-Schools. Illustrated with numerous engravings, and containing copious experiments with directions for preparing them. New edition, revised and enlarged, and illustrated by 269 illustrations on wood. Crown 8vo, cloth
RAMMELSBERG (C, F.) Guide to a Course of Quantitative Chemical Analysis, especially of Minerals and Furnace Pro- ducts. Illustrated by Examples. Translated by J. Towler, M.D. 8vo, cloth
RANDAI.L (P. M.) Quartz Operator's Hand-Book. New edition, revised and enlarged, fully illustrated. 12mo, cloth 2 00
RANKINE (W. J. M.) Applied Mechanics, comprising Principles of Statics, Cinematics, and Dynamics, and Theory of Structures, Mechanism, and Machines. Crown 8vo, cloth. Tenth edition. London
A Manual of the Steam-Engine and other Prime Movers, with numerous tables and illustrations. Crown 8vo, cloth. Tenth edition. London, 1882.
A Selection from the Miscellaneous Scientific Papers of, with Memoir by P. G. Tait, and edited by W. J. Millar, C.E. 8vo, cloth. London, 1880.

RANKINE (W. J. M.) A Manual of Machinery and Mill-work, Fourth edition. Crown 8vo. London, 1881 \$5 00
Civil Engineering, comprising Engineering Surveys, Earthwork, Foundations, Masonry, Carpentry, Metal- works, Roads, Railways, Canals, Rivers, Water-works, Harbors, etc., with numerous tables and illustrations, Fourteenth edition, revised by E. F. Bamber, C.E. 8vo. London, 1839
Useful Rules and Tables for Architects, Builders, Carpenters, Coachbuilders, Engineers, Founders, Mechanics, Shipbuilders, Surveyors, Typefounders, Wheelwrights, etc. Sixth edition. Crown 8vo, cloth. London, 1883
RICE 'Prof. J. M.) and JOHNSON (Prof. W. W.) On a New Method of Obtaining the Differentials of Functions, with especial reference to the Newtonian Conception of Rates or Velocities. 12mo, paper 50
ROGERS (Prof. H. D.) The Geology of Pennsylvania. A Government Survey, with a General View of the Geology of the United States, Essays on the Coal Formation and its Fossils, and a description of the Coal Fields of North America and Great Britain. Illustrated with Plates and Engravings in the text. 3 vols. 4to, cloth, with Portloho of Maps 30 00
ROEB. ING (J A) Long and Short Span Railway Bridges. Illustrated with large copperplate engravings of plans and views. Imperial folio, cloth
ROSE (JOSHUA, M.E.) The Pattern-Maker's Assistant, embracing La he Work, Branch Work Core Work, Sweep Work, and Practical Gear Constructions, the Preparation and Use of Tools, together with a large collection of useful and valuable Tables. Third edition. Illustrated with 250 engravings, 8vo, cloth
SABINE (ROBERT). History and Progress of the Electric Telegraph, with descriptions of some of the apparatus. Second edition, with additions, 12mo, cloth
SAELTZER (ALEX) Treatise on Acoustics in connection with Ventilation 12mo, cloth
SCHUMANN (F) A Manual of He-ting and Ventilation in its Practical Application for the use of Engineers and Architects, embracing a series of Tables and Formula for dimensions of heating, flow and return (it) is for steam and hotwater boilers, flues, etc., etc., 12 no. Illustrated. Full roan.
Formulas and Tables tor Architects and Engineers in calculating the strains and capacity of structures in Iron and Wood 12mo, morece, tucks

SAWYER (W. E.) Electric-Lighting by Incandescence, and its Application to Interior Illumination. A Practical Treatise, With 96 illustrations. Third edition. 8vo, cloth.\$2
SCRIBNER (J. M.) Engineers' and Mechanics' Companion, comprising United States Weights and Measures, Mensuration of Superfices and Solids, Tables of Squares and Cubes, Square and Cube Roots, Circumference and Areas of Circles, the Mechanical Powers, Centres of Gravity, Gravitation of Bodies, Pendulums, Specific Gravity or Bodies, Strength, Weight, and Crush of Materials, Water-Wheels, Hydrostatics, Hydraulics, Statics, Centres of Percussion and Gyration, Friction Heat, Tables of the Weight of Metals, Scantling, etc., Steam and the Steam-Engine, Nineteenth edition, revised, 16m0, full morocco.
Engineers', Contractors', and Surveyors' Pocket Table-Book. Comprising Logarithms of Numbers, Logarithmic Sines and Tangents, Natural Sines and Natural Tangents, the Traverse Table, and a full and complete set of Excavation and Embankment Tables, together with numerous other valuable tables for Engineers, etc. Eleventh edition, revised, 16mo, full morocco.
SHELLEN (Dr. H.) Dynamo-Electric Machines. Translated, with much new matter on American practice, and many illustrations which now appear for the first time in print, 8vo, cloth, New York
SHOCK (Chief-Eng. W. H.) Steam-Boilers: their Design, Construction, and Management. 450 pages text. Illustrated with 150 wood-cuts and 56 full-page plates (several double). Quarto. Illustrated. Half morocco
SHUNK (W. F.) The Field Engineer. A handy book of practice in the Survey, Location, and Track-work of Railroads, containing a large collection of Rules and Tables, original and selected, applicable to both the Standard and Narrow Gauge, and prepared with special reference to the wants of the young Engineer. Third edition. 12me, morocco, tucks.
SHIELDS (J. E.) Notes on Engineering Construction. Embracing Discussions of the Principles involved, and Descriptions of the Material employed in Tunnelling, Bridging, Canal and Road Building, etc., etc. 12mo, cloth
SHREVE (S. H.) A Treatise on the Strength of Bridges and Roofs. Comprising the determination of Algebraic formulas for strains in Horizontal, Inclined or Rafter, Triangular, Bowstring, Lenticular, and other Trusses, from fixed and moving loads, with prectical applications and examples, for the use of Students and Engineers. 87 wood-cut illustrations. Third edition. 8vo, cloth

SIMMS (F. W.) A Treatise on the Principles and Practice of Levelling, showing its application to purposes of Railway Engineering and the Construction of Roads, etc. Revised
and corrected, with the addition of Mr. Laws's Fractical Examples for setting out Railway Curves. Illustrated. 8vo, cloth
STILLMAN (PAUL) Steam-Engine Indicator, and the Improved Manometer Steam and Vacuum Gauges—their Utility and Application. New edition. 12mo, flexible cloth 1 00
STONEY (B. D.) The Theory of Strains in Girders and similar structures, with observations on the application of Theory to Practice, and Tables of Strength and other properties of Materi ils. New and revised edition, enlarged. Koyal 8vo, 664 pages. Complete in one volume. 8vo, cloth
STUART (CHAS. B., U. S. N.) The Naval Dry Docks of the United States. Illustrated with 24 engravings on steel. Fourth edition, cloth
— The Civil and Military Engineers of America. With 9 finely executed portraits of eminent engineers, and illustrated by engravings of some of the most important works constructed in America. 8vo, cloth
STUART (B.) How to Become a Successful Engineer. Being Hints to Youths intending to adopt the Profession. Sixth edition. 12mo, boards
SWEET (S. H.) Special Report on Coal, showing its Distribution, Classification, and Cost delivered over different routes to various points in the State of New York and the principal cities on the Atlantic Coast. With maps.
TEXT-BOOK (A) ON SURVEYING. Projections, and Portable Instruments, for the Use of the Cadet Midshipmen at the U. S. Naval Academy. Nine iithographed plates and several wood-cuts. 8vo, cloth 200
TONER (J. M.) Dictionary of Elevations and Climatic Register of the United States. Containing, in addition to Elevations, the Latitude, Mean Annual Temperature, and the total Annual Rain-fall of many localities; with a brief introduction on the Orographic and Physical Peculiarities of North America. 800, cloth
TUCKER (Dr. J. H.) A Manual of Sugar Analysis, including the Applications in General of Analytical Methods to the Sugar Industry. With an Introduction on the Chemistry of Cane Sugar, Dextrose, Levulose, and Milk Sugar, 80c, cloth, illustrated
TUNNER (P.) A Treatise on Roll-Turning for the Manufacture of Iron Translated and adapted by John B. Pearse, of the Pennsylvania Steel-Works, with numerous engravings, wood-cuts, and folio atlas of plates

D. VAN NOSTRAND'S PUBLICATIONS.

VAN WAGENEN (T. F.) Manual of Hydraulic Mining, for the use of the Practical Miner. 12mo, cloth
WALKER (W. H.) Screw Propulsion. Notes on Screw Propulsion: Its Rise and History. 8vo, cloth
WANKLYN (J. A.) A Practical Treatise on the Examination of Milk and its Derivatives, Cream Butter, and Cheese. 12mo, cloth
WATT (ALEX.) Electro-Metallurgy, Practically Treated. Sixth edition, with considerable additions 12mo, cloth 1 or
WEISBACH (JULIUS). A Manual of Theoretical Mechanics. Translated from the fourth augmented and improved German edition, with an introduction to the Calculus, by Eckley B. Coxe, A.M., Mining Engineer. 1,100 pages, and 902 wood-cut illustrations. 8vo, cloth
WEYRAUCH (J. J.) Strength and Calculations of Dimensions of Iron and Steel Construction, with reference to the Latest Experiments. 12mo, cloth, plates
WILLIAMSON (R, S) On the use of the Barometer on Surveys and Reconnoissances. Part I. Meteorology in its Connection with Hypsometry. Part II. Barometric Hypsometry. With Illustrative Tables and Engravings. 4to, cloth 15 o
Practical Tables in Meteorology and Hypsometry, in connection with the use of the Barometer. 4to, cloth 2 5

Complete 112-page Catalogue of works in every department of science sent postpaid to any address on receipt of ten cents in postage stamps.

THE UNIVERSITY SERIES.

No. 1. ON THE PHYSICAL BASIS OF LIFE. By Prof. T. H. Huxley, LL.D., F.R.S. With an introduction by a Professor in Yale College. 12mo, pp. 36. Paper cover	25
No. 2. THE CORRELATION OF VITAL AND PHYSICAL FORCES. By Prof. George F. Barker, M.D., of Yale College. 36 pp. Paper covers	
No. 3. AS REGARDS PROTOPLASM, in relation to Prof. Hux- ley's "Physical Basis of Life." By J. Hutchinson Stirling, F.R.C.S. 72 pp	25
No. 4. ON THE HYPOTHESIS OF EVOLUTION, Physical and Metaphysical. By Prof. Edward D. Cope. 12mo, 72 pp. Paper covers	25
No. 5. SCIENTIFIC ADDRESSES—1. On the Methods and Tendencies of Physical Investigation 2. On Haze and Dust. 3 On the Scientific Use of the Prof. John Tyndall, F.R.S. 12mo, 74 pp. Paper covers	25 50
No. 6. NATURAL SELECTION AS APPLIED TO MAN. By Alfred Russell Wallace. This pamphlet treats (1) of the Development of Human Races under the Law of Selection; (2) the Limits of Natural Selection as applied to Man. 54 pp.	2 5
No. 7. SPECTRUM ANALYSIS. Three lectures by Profs. Roscoe, Huggins, and Lockyer. Finely illustrated. 88 pp. Paper covers	25
No. 8. THE SUN. A sketch of the present state of scientific opinion as regards this body. By Prof. C. A. Young, Ph.D., of Dartmouth College. 58 pp. Paper covers	25
No. 9. THE EARTH A GREAT MAGNET. By A. M. Mayer, Ph. D., of Stevens Institute. 72 pp. Paper covers	25 50
No. 10. MYSTERIES OF THE VOICE AND EAR. By Prof. O. N. Rood, Columbia College, New York. Beautifully illustrated. 38 pp. Paper covers. Or together, 2 vols., cloth	
, ,	-

VAN NOSTRAND'S SCIENCE SERIES.

, ,	•		dem	illustrated ands.)				ct
No. 1. ST tion	CHIMN EAM-Bo	IEYS FO	R FURN By R	ACES, FIR Armstrong,	E-PI.AC C.E. S	ES, econd	AND edi-	50
No. 2.	STEAM	-BOILER	EXPLO	OSIONS. B	y Zerah	Colb	urn	
No. 3 By	PRACT Arthur	ICAL DE	SIGNIN	G OF RET	AINING	WA	LLS.	50
No. 4.	PROPO	RTIONS	OF PIN	IS USED II	BRID	GES.	Ву	En
No. 5.	VENTI	LATION	OF BUI	LDINGS.	By W. F.	Butl	er	50 50
No. 6	ON TH	E DESIG	SNING	AND CON By Arthur	STRUC	TION	OF	
No 7.	SURCH	ARGED WALLS.	AND DI	FFERENT les S. Tate,	FORM:	s of	RE-	,. EO
No. 8	A TRE	ATISE O	N THE	COMPOUN dition, revise	D ENG	INE.	. W.	
No. 9. pen	FUEL. ded the RED W	By C. W VALUE ITH COA	illiam Si OF Al L. By	emens, D.C. RTIFICIAL John Worma	L.; to w FUEL ld, C.E	hich i	s ap- OM-	50
No to	COMP	OUND E	NGINES	5. Translate	d from t	he Fr	ench	
No. 11.	THEO	RY OF A	RCHES.	By Prof. V	V. Allan.			50
No 12	A THE	ORVOE	VOIISS	TIR ARCH	ES Ru	Prof	w	
No. 13 kins	GASES	MET W	ITH IN	COAL-MIN	ES. By	J. J.	At-	50
No. 11.	FRICT	ION OF A	AIR IN I	MINES, By	J. J. At	kinso	n (50
No. 15 trat	SKEW ed	ARCHES	S. By F	rof. E. W.	Hyd e, C.	E. 1	llus-	
No. 16. AL	A GRA GEBRA	PHIC MI IC EQUA	ETHOD TIONS	FOR SOL	VING C George I	ERT.	AIN e	50
Cor	field of	the Unive	rsity Coll	SUPPLY.				50
No. 18. Pro	SEWE f. W. H	RAGE Al	ND SEV	VAGE UTI f the Univer	LIZATI	ON. lege,	By Lon-	
don	CTDE	MOTH O	E DEAT		TDAN		<u>.</u>	90
LO.	ADS.	By Prof. W	. Allan,	author of "	Theory of	Arch	ies" i	50

No. 20. BRIDGE AND TUNNEL CENTRES. By John B. Mc- Master, C.E
No. 21. SAFETY VALVES. By Richard H. Buel, C.E 50
No. 22. HIGH MASONRY DAMS. By John B. McMaster,
No. 22. HIGH MASONRY DAMS. By John B. McMaster, C.E
No. 24. A PRACTICAL TREATISE ON THE TEETH OF WHEELS, By Prof. S. W. Robinson
TINUOUS BRIDGES. By Mansfield Merriman, Ph.D 50
No. 26. PRACTICAL TREATISE ON THE PROPERTIES OF CONTINUOUS BRIDGES. By Charles Bender, C.E. 50
No. 27. ON BOILER INCRUSTATION AND CORROSION. By F. J. Rowan
No. 27. ON BOILER INCRUSTATION AND CORROSION. By F. J. Rowan. 50 No. 28. TRANSMISSION OF POWER BY WIRE ROPES. By Albert W. Stahl, U. S. N. 50
No. 20. STEAM INJECTORS. Translated from the French of M. Leon Pochet
By Albert W. Stahl, U. S. N
No. 31. THE SANITARY CONDITION OF DWELLING-HOUSES IN TOWN AND COUNTRY. By George E. Waring, Jr50
No. 32. CABLE-MAKING OF SUSPENSION BRIDGES, By W. Hildenbrand, C.E
No. 33. MECHANICS OF VENTILATION. By George W. Rafter, C E
lated from the French 50
No. 95. THE ANEROID BAROMETER: ITS CONSTRUC- TION AND USE, Compiled by George W. Plympton Second edition
No. 36. MATTER AND MOTION. By J. Clerk Maxwell, M.A. 50
No. 37. GEOGRAPHICAL SURVEYING: Its Uses, Methods, and Results. By Frank De Yeaux Carpenter, C E. 50
No. 38. MAXIMUM STRESSES IN FRAMED BRIDGES. By Prof. Wm. Cain, A.M., C.E
No 39. A HAND-BOOK OF THE ELECTRO-MAGNETIC TELEGRAPH. By A. E. Loring
No. 40. TRANSMISSION OF POWER BY COMPRESSED AIR. By Robert Zahner, M.E
No 41. STRENGTH OF MATERIALS. By Wm. Kent, C.E., 50

No. 42. VOUSSOIR ARCHES APPLIED TO STONE BRIDGES, TUNNELS, CULVERTS, AND DOMES. By Prof. Wm. Cain. 50 No. 43. WAVE AND VORTEX MOTION. By Dr. Thomas Craig, of Johns Hopkins University. 50
No. 43. WAVE AND VORTEX MOTION. By Dr. Thomas Craig, of Johns Hopkins University
No. 44. TURBINE WHEELS. By. Prof. W. P. Trowbridge, Columbia College. 50 No. 45. THERMODYNAMICS. By Prof. H. T. Eddy, Univer- sity of Cincinnati
No 45. THERMODYNAMICS. By Prof. H. T. Eddy, Univer-
No. 46, ICE-MAKING MACHINES. From the French of M.
No. 47. LINKAGES; THE DIFFERENT FORMS AND
No. 48. THEORY OF SOLID AND BRACED ARCHES. By Wm. Cain, C.E. 50 No. 49. ON THE MOTION OF A SOLID IN A FLUID. By Thomas Craig, Ph.D. 50
No. 49. ON THE MOTION OF A SOLID IN A FLUID. By Thomas Craig, Ph D
and Arrangements, By Prof. W. H. Corfield
No. 52. THE TELESCOPE: Its Construction, etc. By I hos. Nolan
French of M. Argand. By Prof. Hardy 50
No. 53. INDUCTION COILS: How Made and How Used 50 No. 54. KINEMATICS OF MACHINERY. By Prof. Kennedy. With an introduction by Prof. R. H. Thurston
With an introduction by Prof. R. H. Thurston 50 No. 55. SEWER GASES: Their Nature and Origin. By A. De
No. 55. SEWER GASES: Their Nature and Origin. By A. De Varona. 50 No. 56. THE ACTUAL LATERAL PRESSURE OF EARTH- WORK, By Benj, Baker, M. Inst. C.E. 50
No. 57, INCANDESCENT ELECTRIC LIGHTS, WITH PARTICULAR REFERENCE TO THE EDISON LAMPS AT THE PARIS EXHIBITION. By Come Th, Du Moncel, Wm. Henry Freece, J. W. Howell, and others. Second edition. No. 58, THE VENTILATION OF COAL-MINES. By W. Fairley, M.E., F.S.S. No. 59, RAILROAD ECONOMICS; or, Notes, with Comments. By S. W. Robinson, C.E.
No. 58. THE VENTILATION OF COAL-MINES. By W. Fairley, M.E., F.S.S.
No. 59. RAILROAD ECONOMICS; or, Notes, with Comments. By S. W. Robinson, C.E
BERS. By S. W. Robinson, C E
No. 61. POTABLE WATER AND THE DIFFERENT METHODS OF DETECTING IMPURITIES. By Chas. W. Folkard

No. 62. THE THEORY OF THE GAS ENGINE. By Dugald Clerk
No. 62. THE THEORY OF THE GAS ENGINE. By Dugald Clerk
No 64 FLECTRO-MAGNETS By Th Du Moncel
No. 65. FOCKET LOGARITHMS TO FOUR PLACES DE- CIMALS
No. 65 FOCKET LOGARITHMS TO FOUR PLACES DE- CIMALS 50 No. 66 DYNAMO-ELECTRIC MACHINERY. By S. P. Thompson. With notes by F. 1. Pope 50
No. 67. HYDRAULIC TABLES, BASED ON "KUTTER'S FORMULA." By P. J. Flynn 50
No. 68. STEAM-HEATING. By Robert Briggs 50
No. 69. CHEMICAL PROBLEMS. By Prof. J. C. Foye. Second edition, revised and enlarged
No. 70. EXPLOSIVES AND EXPLOSIVE COMPOUNDS. By M. Bertholet
No. 59, CHEMICAL PROBLEMS, By Prof. J. C. Foye. See- ond edition, revised and enlarged
No. 72. TOPOGRAPHICAL SURVEYING. By Geo. J. Specht,
No. 73. SYMBOLIC ALGEBRA; or, The Algebra of Algebraic Numbers. By Prof. W. Cain
No. 73. SYMBOLIC ALGEBRA; or, The Algebra of Algebraic Numbers. By Prof. W. Cain. No. 74. TESTING-MACHINES, Their History, Construction, and Use. By Arthur V. Abbott
No. 75. RECENT PROGRESS IN DYNAMO-ELECTRIC MA- CHINES. Being a Supplement to Dynamo-Electric Ma- chinery. By Prof. Sylvanus P. Thompson
No. 76. MODERN REPRODUCTIVE GRAPHIC PRO- CESSES. By Lt. Jas. S. Pettit, U.S.A
No. 77. STADIA SURVEYING, The Theory of Stadia Measure-
No. 78. THE STEAM-ENGINE INDICATOR, and Its Use. By W. B. Le Van
No. 78. THE STEAM-ENGINE INDICATOR, and Its Use. By W. B. Le Van. No. 79. THE FIGURE OF THE EARTH. By Frank C. Roberts, C.E. No. 80. HEALTHY FOUNDATIONS FOR HOUSES. By Glenn Brown. 50
No. 80. HEALTHY FOUNDATIONS FOR HOUSES. By Glenn Brown
No. 87. WATER METERS: Comparative Tests of Accuracy, Delivery, etc. Distinctive features of the Worthington, Ken- nedy, Siemens, and Hesse Meters. By Ross E. Browne 50
No. 82. THE PRESERVATION OF TIMBER by the use of Antiseptics. By Samuel Bagster Boulton, C.E 50
No. 83. MECHANICAL INTEGRATORS. By Prof. Henry S. H. Shaw, C. E











